

primus

laundry equipment

Xtreme  
in innovation

## Professional Chest Heated Ironers

I 25, I 30



### FEATURES

- Safety finger protection and emergency button for more safety
- Foot pedal for easy start and stop operation
- Unlimited variable temperature control
- High ironing pressure
- Automatic lifting and lowering of the heating bed
- Built-in large laundry box
- Cabinet in galvanized steel
- Space saving installation against the wall is possible: front return
- Unlimited variable speed by means of frequency control (I 25-140, I 30-160, I 30-200)
- Electric heating



COMPACT DESIGN



EASY OPERATION



OPTIMIZED OUTPUT


| TYPE                                      |                | I 25 - 100                           | I 25 - 120    | I 25 - 140    | I 30 - 160    | I 30 - 200    |
|---|----------------|--------------------------------------|---------------|---------------|---------------|---------------|
| <b>CAPACITY</b>                           |                |                                      |               |               |               |               |
| Roller Diameter                           | mm             | 250                                  | 250           | 250           | 300           | 300           |
| Roller Length                             | mm             | 1000                                 | 1200          | 1400          | 1600          | 2000          |
| Roller with unlimited variable speed      |                | -                                    | -             | Standard      | Standard      | Standard      |
| Roller speed                              | m/min.         | 3,9                                  | 3,9           | 4,1           | 4,1           | 4,1           |
| Output                                    | kg/h           | 30                                   | 35            | 40            | 45            | 52            |
| Residual moisture                         | %              | 10-15                                | 10-15         | 10-15         | 20-25         | 20-25         |
| <b>HEATING</b>                            |                |                                      |               |               |               |               |
|   |                | Electrical                           | Electrical    | Electrical    | Electrical    | Electrical    |
| <b>OPERATION</b>                          |                |                                      |               |               |               |               |
| Built-in exhaust fan                      |                | -                                    | -             | -             | Standard      | Standard      |
| <b>CONSUMPTION</b>                        |                |                                      |               |               |               |               |
| Heating elements                          | kW             | 5                                    | 6             | 7             | 13,2          | 16,8          |
| Bed motor                                 | kW             | 0,18                                 | 0,18          | 0,18          | 0,48          | 0,67          |
| Roller motor                              | kW             | -                                    | -             | -             | 0,48          | 0,48          |
| <b>CONNECTIONS</b>                        |                |                                      |               |               |               |               |
|   |                | 3x380-400V/50Hz<br>Others on Request |               |               |               |               |
| <b>DIMENSIONS (HxWxD)</b>                 |                |                                      |               |               |               |               |
|   | mm             | 1005x1400x420                        | 1005x1600x420 | 1005x1800x420 | 1100x2200x500 | 1100x2600x500 |
| <b>TRANSPORT DATA</b>                     |                |                                      |               |               |               |               |
| Crated (cardboard box) dimensions (HxWxD) | mm             | 1150x1480x500                        | 1150x1680x500 | 1150x1880x500 | 1260x2280x590 | 1260x2690x590 |
| Crated volume                             | m <sup>3</sup> | 0,85                                 | 0,97          | 1,1           | 1,69          | 1,99          |
| <b>WEIGHT</b>                             |                |                                      |               |               |               |               |
| Net                                       | kg             | 100                                  | 118           | 126           | 262           | 294           |
| Gross                                     | kg             | 119                                  | 130           | 145           | 300           | 350           |

Standard = standard execution

+ = available(optional)

- = not available

The data concerning dimensions of machines include all extended parts

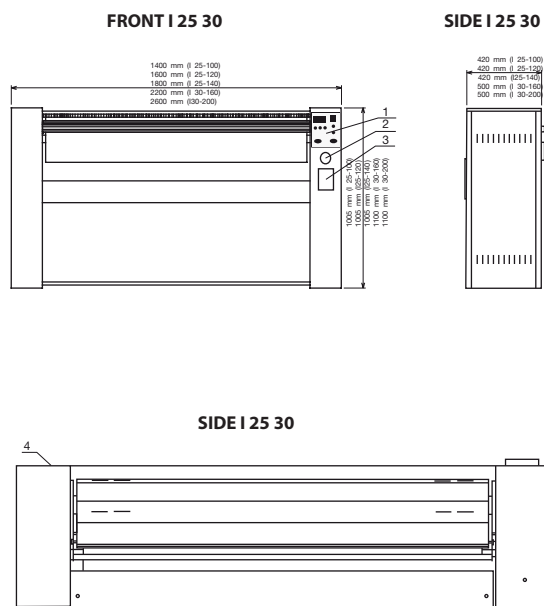

1. Control panel
2. Emergency stop button
3. Manual roller drive
4. Main switch and power supply

The company Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

[www.primuslaundry.com](http://www.primuslaundry.com)

